



Granični prekidač YBLX-K2



Konfiguracija kontakata

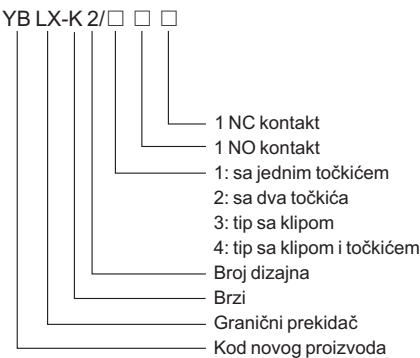

Sertifikat: UKRTEST, UL

Standardna termička struja	5A
Nominalni napon	AC 380V DC 220V
Nominalna struja	AC 0.8A DC 0.16A
Brzina rada (operacija/minute)	160
Mehanički vek trajanja (operacije)	60×10^4
Temperatura sredine	-25℃~+40℃
Relativna vlažnost	≤90%
Nadmorska visina	≤2000m
Napon izdržljivosti	između izvoda istog polariteta (1140V) između delova pod naponom i zemlje (2500V)
Primena	kontrola kretanja i granična zaštita u upravljačkim kolima
Standard	IEC 60947-5-1

Model	Režim rada
YBLX-K2/111	Točkić sa automatskim vraćanjem
YBLX-K2/211	Točkić bez bez vraćanja
YBLX-K2/311	Klipni tip sa automatskim vraćanjem
YBLX-K2/411	Klipni tip bez bez vraćanja

YBLX-K2/111




YBLX-K2/211



YBLX-K2/411K



YBLX-K2/101, YBLX-K2/411

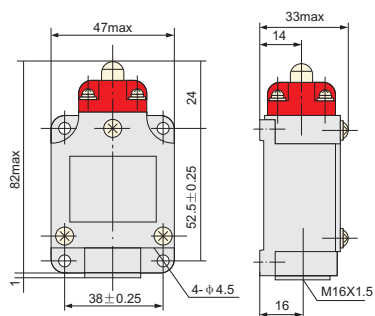

YBLX-K2/001, YBLX-K2/311