


Granični prekidač YBLX-ME



Konfiguracija kontakata

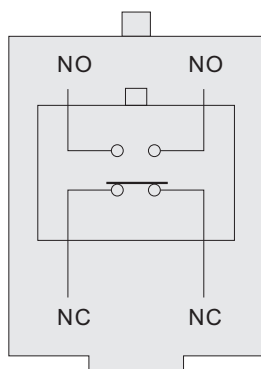


Sertifikati: UKRTEST, UL


Nivo zaštite		IP52
Brzina rada (operacije/minut)	Mehanička	120
	Električna	30
Mehanički vek trajanja (operacije)		60×10^4
Električni vek trajanja (operacije)		30×10^4
Izolacioni otpor		$\geq 5M \Omega$ (DC500V)
Kontaktni otpor		$\leq 200m \Omega$ (početna vrednost)
Temperatura sredine		$-15^{\circ}C \sim +60^{\circ}C$
Relativna vlažnost		$\leq 95\%$
Napon na izdržljivost		između izvoda istog polariteta (1140V)
		između delova pod naponom i zemlje (2500V)
		između izvoda i metalnih delova koji nisu pod naponom (2500V)
Nominalni napon		AC 380V DC 220V
Nominalna struja		AC 0.8A DC 0.16A

Model	Režim rada	Model	Režim rada
YBLX-ME/8104	Sa točkićem i isturenom pravom polugom	YBLX-ME/8166	Slobodan pravac tip I
YBLX-ME/8107	Regulišuća poluga bez točkića	YBLX-ME/8169	Slobodan pravac tip II
YBLX-ME/8108	Sa točkićem i regulišućom poluganom	YBLX-ME/8101	Slobodan pravac tip III
YBLX-ME/8111	Bez točkića, bez poluge		
YBLX-ME/8112	Metalni točkić	YBLX-ME/8122	Metalni točkić
	Horizontalno pokretanje		Horizontalno pokretanje


YBLX-ME/8104

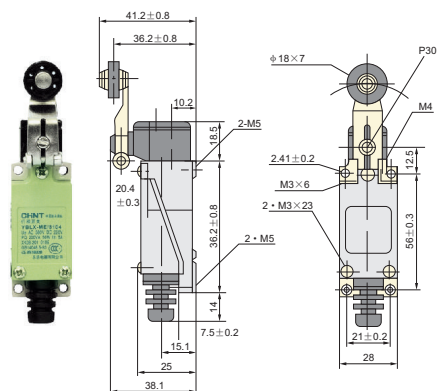


YBLX-ME/8108

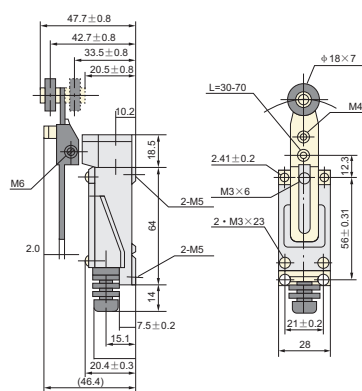


YBLX-ME/8107

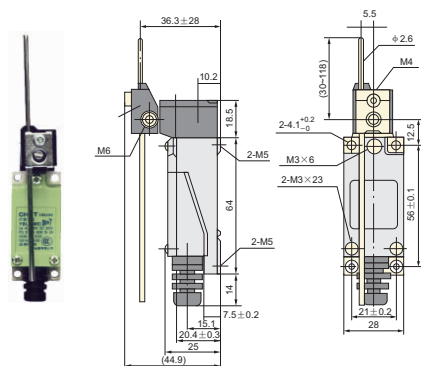


YBLX-ME/8111

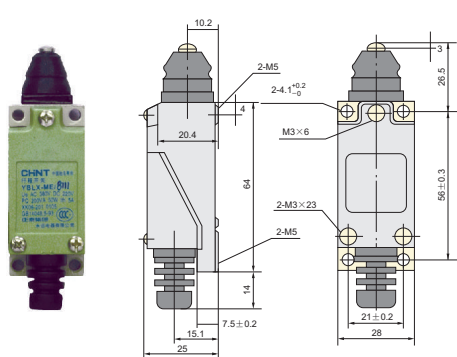


YBLX-ME/8112

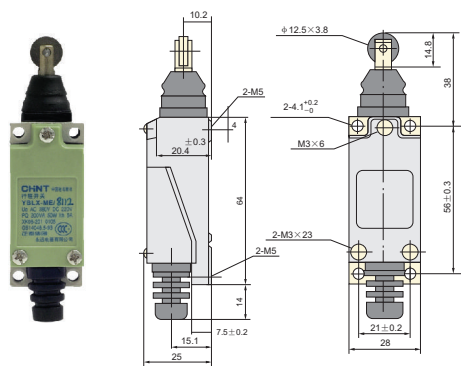


YBLX-ME/8122

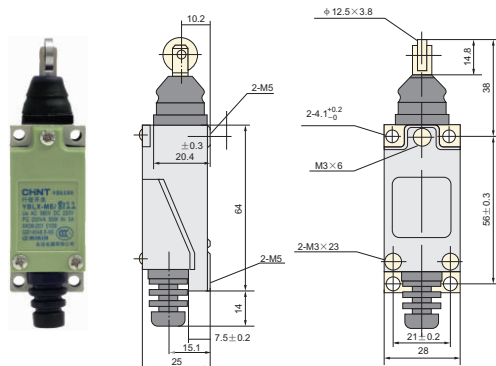

YBLX-ME/8166

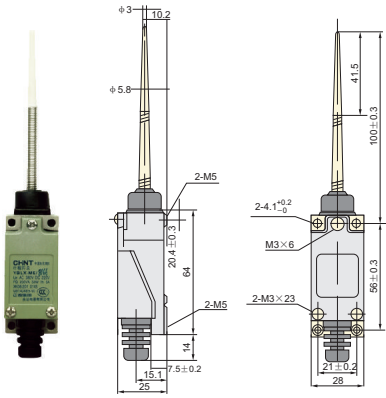

YBLX-ME/8101

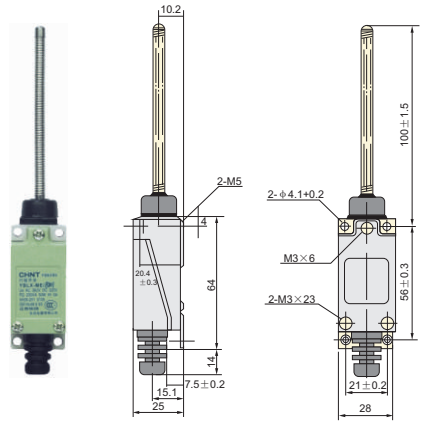

YBLX-ME/8169

