


material	brass nickel-plated
hermetic seal	nitrile rubber
O-seal cirde	nitrile rubber
protection degree	IP68-10 pressure (rotate position)
ambient temperature	-40°C to 100°C, short time to 120°C

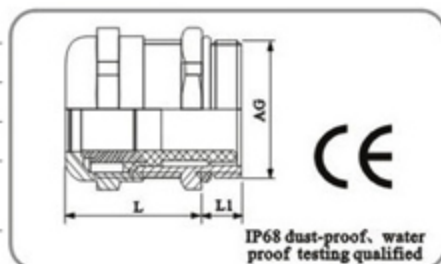

	AG PG	Ø2 mm	L1 mm	L1(length) mm	L mm	Ø mm
 PG9	7	3-6.5	5	10	19	14
	7	2-5	5	10	19	14
	9	4-8	6	10	20	17
 PG13.5	9	2-6	6	10	20	17
	11	5-10	6	10	21	20
	11	3-7	6	10	21	20
	13.5	6-12	6.5	10	22	22
	13.5	5-9	6.5	10	22	22
	16	10-14	6.5	10	23	24
 PG29	16	7-12	6.5	10	23	24
	21	13-18	7	12	25	30
	21	9-16	7	12	25	30
	29	18-25	8	12	29	40
	29	13-20	8	12	29	40
	36	22-32	8	15	35	50
 PG48	36	20-26	8	15	35	50
	42	32-28	9	15	37	57
	42	25-31	9	15	37	57
	48	37-44	10	15	38	64
	48	29-35	10	15	38	64